



FVC
1st

Fingerprint Verification
Competition

eNBioAccess-T9



eNBioAccess-T9

Specification

CPU	1Ghz Quad Core
Memory	1GB RAM / 8GB SD memory
Sensor	Optical / 500 DPI
Authentication Type	Face, Fingerprint, RF Card, PIN
Fingerprint Capacity	250,000 (1:1) / 25,000 (1:N)
Face Capacity	10,000 (1:1) / 2,000 (1:N)
Log capacity	10,000,000 (logs) / 20,000 (imges)
Communication	TCP/IP, Wi-Fi(Optional), Wiegand, RS-485, RS-232
Supported Card	EM, HID, iClass(Optional), Mifare, DESFire
Lock	Deadbolt, EM Lock, Door Strike, Automatic Door
Environment	-20~60°C / < RH 90%
Dimensions	149.5(W) x 208.5(H) x 46(D) mm

S/W Package



>> AccessManager Pro.

Item	Contents
Component	AccessServer / AccessManager / DBMS
Max. Accessing Terminal	2,000 EA
Max. Remote Client	16 (Access Manager)
OS	Windows XP or higher
Max. User	100,000 User (in the Server)
DBMS	MS SQL 2005 or higher, MS SQL Express 2005 or higher
Similar Fingerprint Check	O

Product Family

Model	Description
eNBioAccess - T9	Face, Fingerprint, High Frequency Card (13.56MHz), Low Frequency Card (125kHz)

Main User Interface

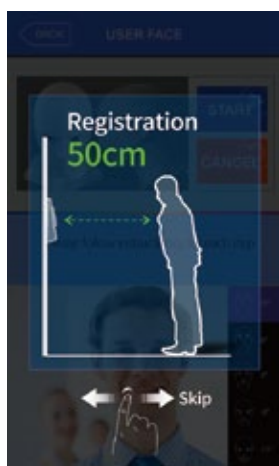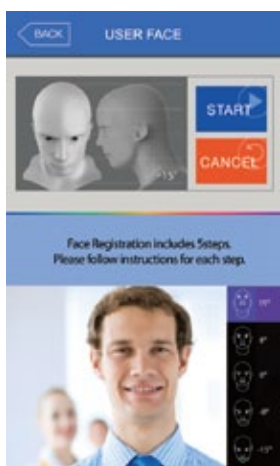

Features

- Face Detection and Identification
 - Auto Tilt Camera
- Built-in Camera
 - Dual camera(IR & Color) with IR LED
- Dual Card Reader Support
 - 125kHz Prox. & 13.56MHz Mifare
- Superior Matching Engine
 - 1st rank in FVC (Fingerprint Verification Competition)
- 5" Touch Color LCD
 - Enhanced Touch Sensitivity
- Touch Keypad

System Configuration

